

Bioinformatics III

Prof. Dr. Volkhard Helms
Dr. Pratiti Bhadra
Winter Semester 2019-2020


Chair for Computational Biology Saarland University
Tutor

Exercise Sheet 9 Graph and Pathways of Metabolic Networks Due: January 16, 2020 14:15

Submit your solutions on paper, hand-written or printed at the beginning of the lecture or in building E2.1, Room 3.01. Alternatively, you can send an email with a single PDF attachment to pratiti.bhadra@bioinformatik.uni-saarland.de and pratiti.bhadra@gmail.com. Subject of the email should be in the following format: Assignment9-"your name".

Please feel free to contact me for any clarifications either via email or you can reach me in building E2.1, Room 3.01 (preferably between 3 pm and 4 pm).

Q1 Stoichiometric Matrix and Extreme Pathways (50 points)

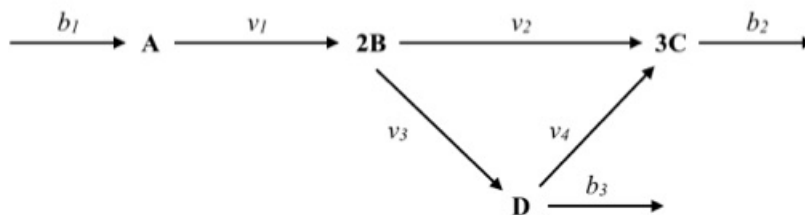


Metabolites are A,B,C and D. There are four internal flux reactions v_1-v_4 and three unconstrained external fluxes b_1 , b_2 and b_3 .

- Determine the stoichiometric Matrix (10 points)
- Calculate the extreme pathways of the above network. Show step wise calculation. Give the extreme pathways as a sum of the individual reactions, and sketch them with a layout similar to the given network. (25 points)
- Determine the pathway length matrix. Which information does it provide? (5 points)
- Determine the reaction participation matrix. Which reaction(s) contribute(s) to the most pathways. (5 points)
- Now assume that reaction b_2 is essential for the organism, i.e. it dies if there is no output via b_2 . Determine from the extreme pathways which (combinations of) internal reactions are essential, i.e. if they are blocked, then the output via b_2 is blocked, too. (5 points)

Q2 Max-flow-min-cut (40 points)

- (a) Find the minimum capacity over all S-T cuts of the given graph. (*hint: Ford Fulkerson algorithm*) (20 points)

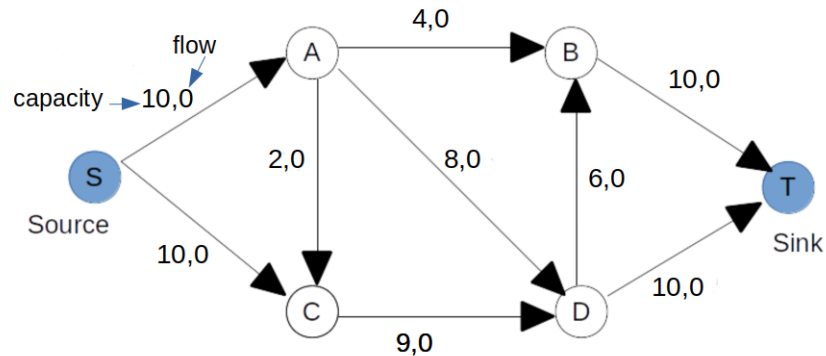

- (b) The counts of supply and demand of four different kinds of food are given in the following table (20 points)

Food type	Vegan	Vegetarian Type A	Vegetarian Type B	Non-Vegetarian
Supply	50	36	11	8
Demand	45	42	8	3

‘Vegetarian Type A’ can only have ‘Vegetarian Type A’ or ‘Vegan’ food; ‘Vegetarian Type B’ can eat only ‘Vegetarian Type B’ or ‘Vegan’; ‘Vegan’ can have only ‘Vegan’ food; and ‘Non-vegetarian’ can eat any of the four types.


Model the problem as a flow network problem. Draw the corresponding network. (*hint: In the network, there will be one source node, one sink node, 4 nodes for the supply of each food type and 4 nodes for the demand of each food type.*)

Is it possible to meet the full demand? Explain why or why not, using an argument based on a min cut. If it is not possible to meet the full demand, the output of your algorithm still is meaningful. What does it tell you?

- (c) **Graph connectivity (10 points)**

- (a) How many internally disjoint V_1 - V_5 paths are in the following graph G? How can you explain this? (3 points)


internally disjoint path (edge-independent path): Paths are internally disjoint if they have no common internal vertex.

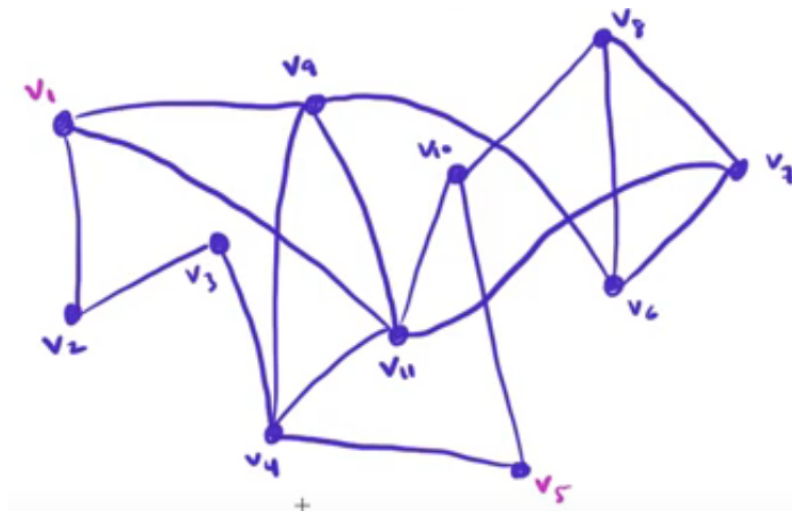


- (b) Let G be a 3-regular graph. The vertex-connectivity of G is equal to 3, $k_v(G) = 3$. Find out the edge-connectivity of the graph G , $k_e(G) = ?$. (3 points)
 A graph is **r-regular** if every vertex has degree r .
- (c) “There exists a connected n -vertex simple graph with $n+1$ edges”. If the above statement is true give an example or if it is false explain why (4 points).
simple graph: An unweighted, undirected graph containing no graph loops or multiple edges. A simple graph may be either connected or disconnected.



simple graph



nonsimple graph
with multiple edges



nonsimple graph
with loops